


Low pressure stainless steel foaming system with brass injector and ST/ST nozzle. Minimum water pressure inlet. 2,5 bar (max. 10 bar, 50°C). Complete with metering tips. Is necessary to provide 100 l/min at 3-6 bar of air. Internal minimum diameter of the hose is 12,5 mm (½")
 The unit is ready for connections.

This unit can not be used with acid based Chemicals.



Cover

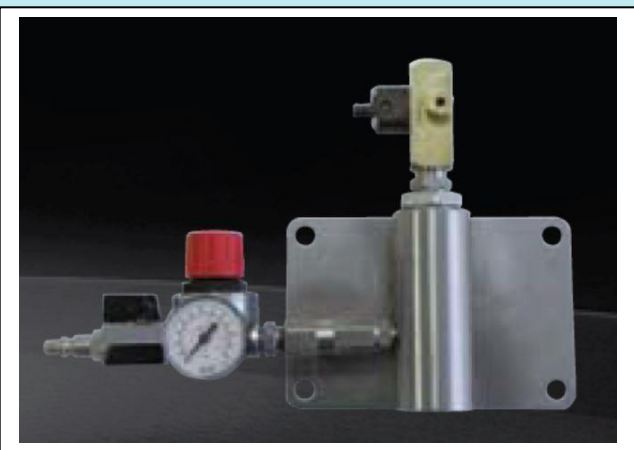

By-Pass



Cover+By-Pass



Double product

On request:

Stainless steel cover, add on code :7076XX CA

By-pass, add on code : 7076XX BY

Cover and by-pass, add on code: 7076XX CA,BY

Double chemical product, add code: TW

Foam Unit, Low Pressure

Article #	707610
Weight	1,5 kg
Max. temp. water inlet	50°C
Working pressure	2,5 – 10 bar
Water inlet	½"
Water/Foam outlet	½"
Size of unit	150x200x50 mm
Material	1.4301


750010H

low pressure hose 10 meter ½" and lance.



751001

½" ball valve gun handle.



752102

foam lance 200 mm.

