


Low pressure stainless steel foaming system with stainless steel injector and ST/ST nozzle. Minimum water pressure inlet. 2,5 bar (max. 10 bar, 50°C). Complete with metering tips. It is necessary to provide 100 l/min at 3-6 bar of air. Internal minimum diameter of the hose is 12,5 mm (½") The unit is ready for connections.

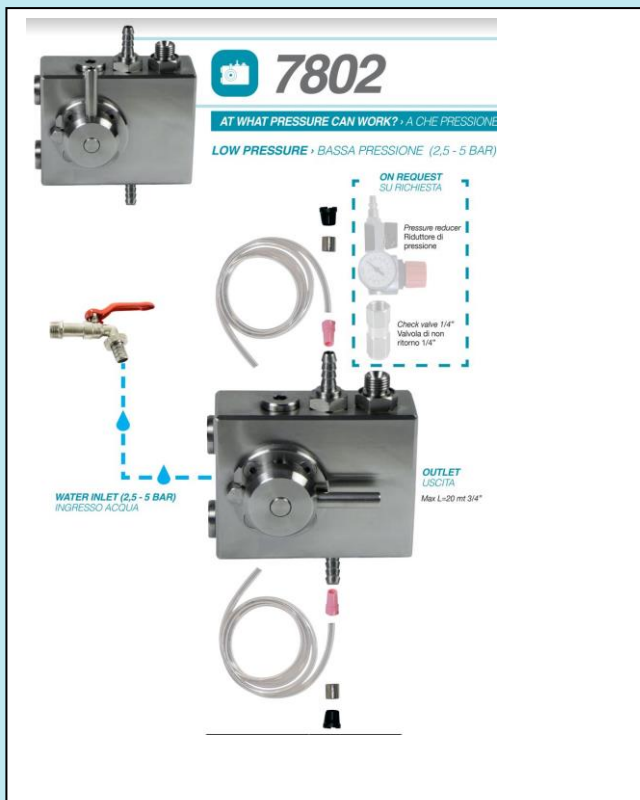

## Foam Unit, Low Pressure

Article #	707801
Weight	2,5 kg
Max. temp. water inlet	80°C
Working pressure	2,5 – 10 bar
Water inlet	½"
Water/Foam, Rinse outlet	½"
Size of unit	150x200x50 mm
Material	1.4301

## OPTIONS:


### 750015H

low pressure hose 15 meter ½".



### 751001

½" ball valve gun handle.



### 752102

foam lance 200 mm.

